

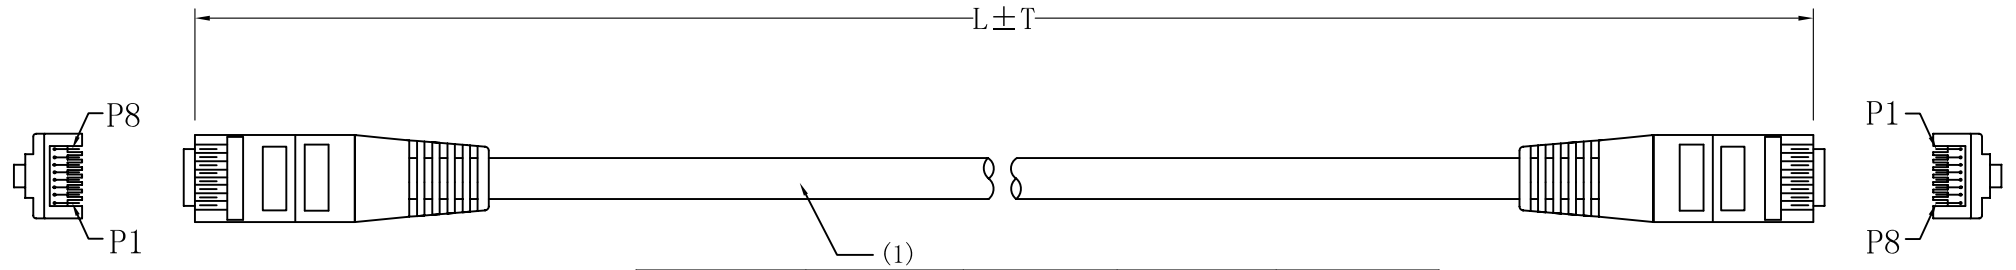
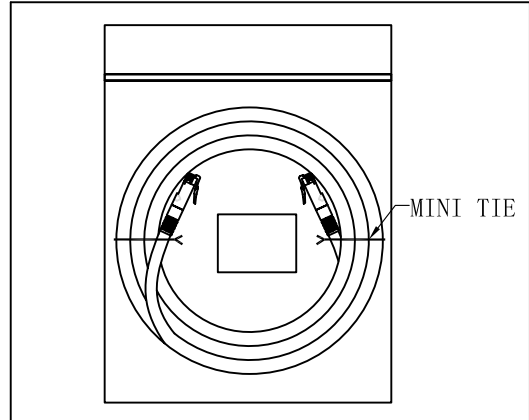
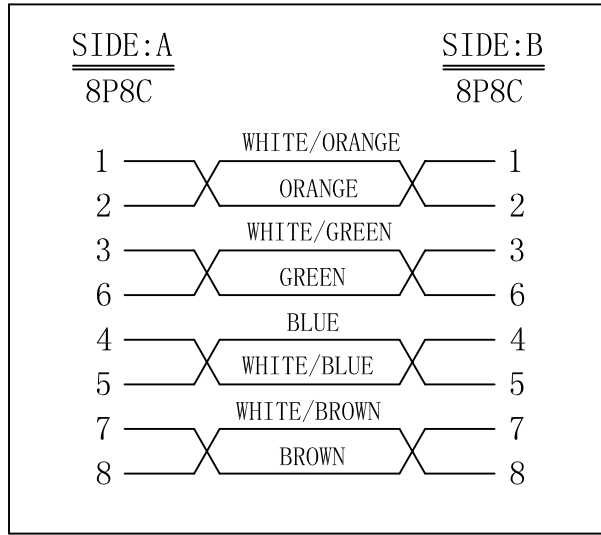


CUSTOMER	NEDIS
PRODUCT NO.	UTP-0008 series

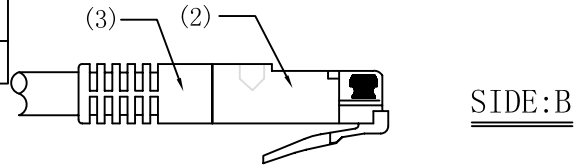

CUSTOMER P/N:	UTP-0008/0.5	UTP-0008/1	UTP-0008/2	UTP-0008/3
L ± T (mm)	500 ± 5	1000 ± 10	2000 ± 20	3000 ± 30
UTP-0008/5	UTP-0008/10	UTP-0008/15	UTP-0008/20	UTP-0008/30
5000 ± 40	10000 ± 70	15000 ± 100	20000 ± 150	30000 ± 200

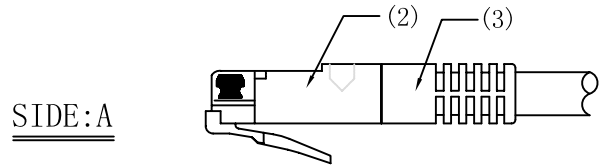

NOTE:

- (1).Cable Wiring: CAT.5E UTP Stranded 26WG(7/0.16mm ± 0.01CCA)*4P
 Jacket Material:PVC OD:5.0 ± 0.15mm
 Cable Colour: Grey
 Cable Printing: System Cable UTP CAT 5E 4 Pairs
 26AWG Stranded ISO 11801 100MHz (AERIAL 12)
- (2).Connector A&B: RJ45(8P8C) Male Type
 INSULATION:Clear Polyester
 CONTACTS:Brass, Gold Plated
- (3).Over Mold: PVC, Grey
- (4).Parameter Settings: UT8080M
 1. Conductive Resistance:1kΩ
 2. Insulative Resistance:5MΩ (Min.)
- (5).Packing: POLYBAG Packing+LABEL

PIN OUT: (4)

PACKING: (5)

GENERAL TOLERANCES (UNLESS SPECIFIED)								
LENGTH: X ± 1 .X ± 0.2 .XX ± 0.10		UNIT:mm	REV:0/A					
ANGLE: X° ± 1° .X° ± 0° 30'		DRAWING	OYF			2010/10/25	S. P. NO.	HT-1381
0		2010/10/25	CHECK		P. O. NO.		DWG. NO.	
REV	DESCRIPTION	DATE	APPROVE		SIZE		PAGE	1/1