




1. DETACHABLE PLUG. YELLOW PLASTIC RING HARDWARE.  
 Ø2.35 X 0.7 X 10.5±0.5mm, I TYPE.

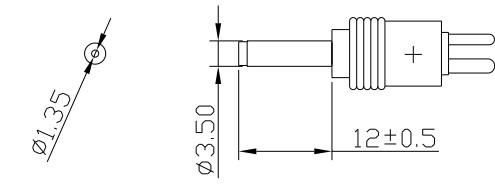


2. DETACHABLE PLUG. BLUE PLASTIC RING HARDWARE.  
 Ø1.35 X 3.5 X 12±0.5mm, I TYPE.

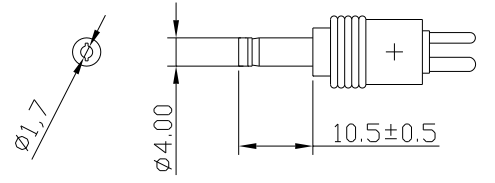


3. DETACHABLE PLUG. YELLOW PLASTIC RING HARDWARE.  
 Ø1.7 X 4.0 X 10.5±0.5mm, I TYPE.

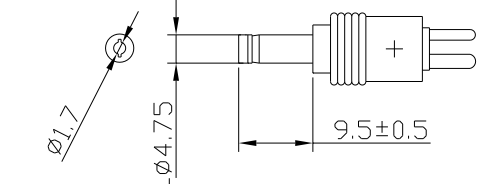


4. DETACHABLE PLUG. YELLOW PLASTIC RING HARDWARE.  
 Ø1.7 X 4.75 X 9.5±0.5mm, I TYPE.

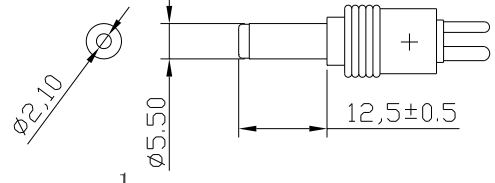


5. DETACHABLE PLUG. ORANGE PLASTIC RING HARDWARE.  
 Ø2.10 X 5.5 X 12.5±0.5mm, I TYPE.

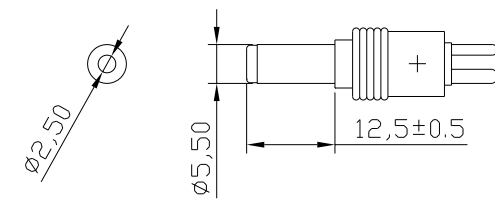

6. DETACHABLE PLUG. RED PLASTIC RING HARDWARE.  
 Ø2.50 X 5.50 X 12.5±0.5mm, I TYPE.

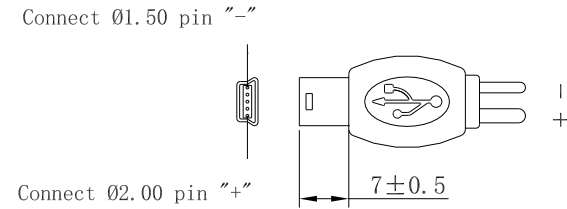


7. Mini USB-B 5 pin I type.

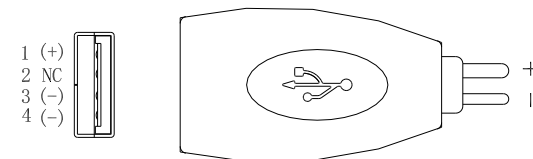

8. USB-A socket I TYPE..

MODEL:VAS-3747-A1

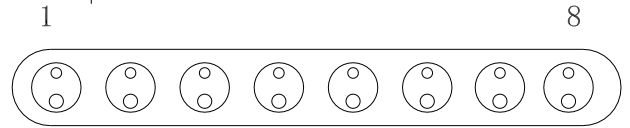

FUNCTION TEST: No open, no reversed polarity, no short-circuit, no INT

CABLE ASSEMBLY SHALL BE IN COMPLIANCE WITH RoHS REQUIREMENT.