



CUSTOMER	NEDIS
PRODUCT NO.	UTP-0008-0.5WH Series

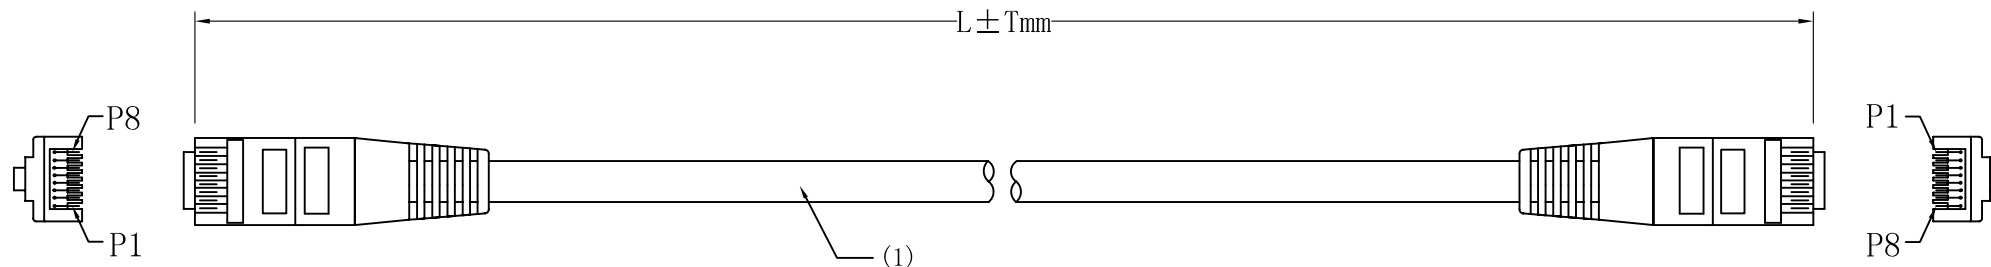


CUSTOMER P/N:	UTP-0008-0.5WH	UTP-0008-1WH	UTP-0008-2WH	UTP-0008-3WH
$L \pm T$ (mm)	500 ± 5	1000 ± 10	2000 ± 20	3000 ± 30
UTP-0008-5WH	UTP-0008-10WH	UTP-0008-15WH	UTP-0008-20WH	UTP-0008-30WH
	5000 ± 40	10000 ± 70	15000 ± 100	20000 ± 150
		30000 ± 200		

SIDE:A

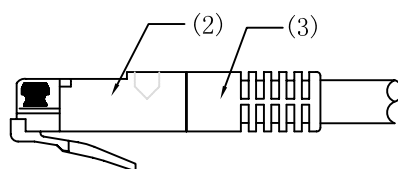

SIDE:A
8P8C


SIDE:B
8P8C

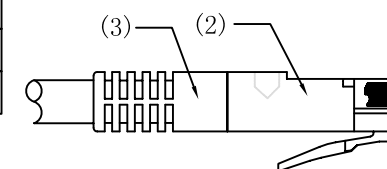


SIDE:B

NOTE:

- Cable Wiring: CAT.5E UTP Stranded 26WG(7/0.16±0.01mmCCA)*4P
Jacket Material:PVC OD:5.0±0.15mm
Cable Colour: WHITE
Cable Printing: System Cable UTP CAT 5E 4 Pairs
26AWG Stranded ISO 11801 100MHz (AERIAL 12)
- Connector A&B: RJ45(8P8C) Male Type
INSULATION:Clear Polyester
CONTACTS:Brass, Gold Plated
- Over Mold: PVC, WHITE
- Parameter Settings: UT8080M
1. Conductive Resistance:1kΩ
2. Insulative Resistance:5MΩ (Min.)
- Packing: POLYBAG Packing+LABEL

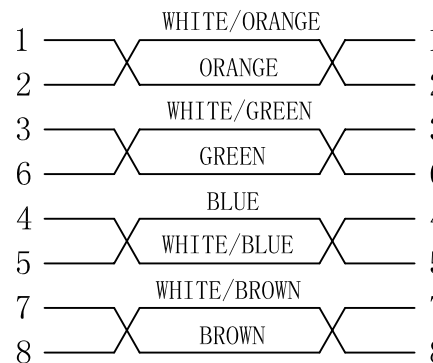

PIN OUT: (4)

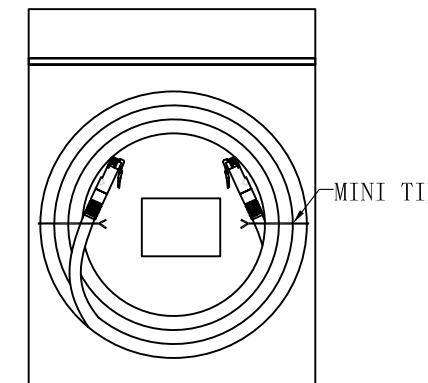

PACKING: (5)

0	REV	DESCRIPTION	DATE	GENERAL TOLERANCES (UNLESS SPECIFIED)	UNIT:mm		REV:0/A		NAME	CAT. 5E UTP CABLE(26AWG CCA)	
					DRAWING	OYF	2010/10/25		S. P. NO.	HT-1385	DWG. NO.
					CHECK			P. O. NO.		PAGE	1/1
					APPROVE			SIZE			