



3.5X7.5M STORAGE TENT

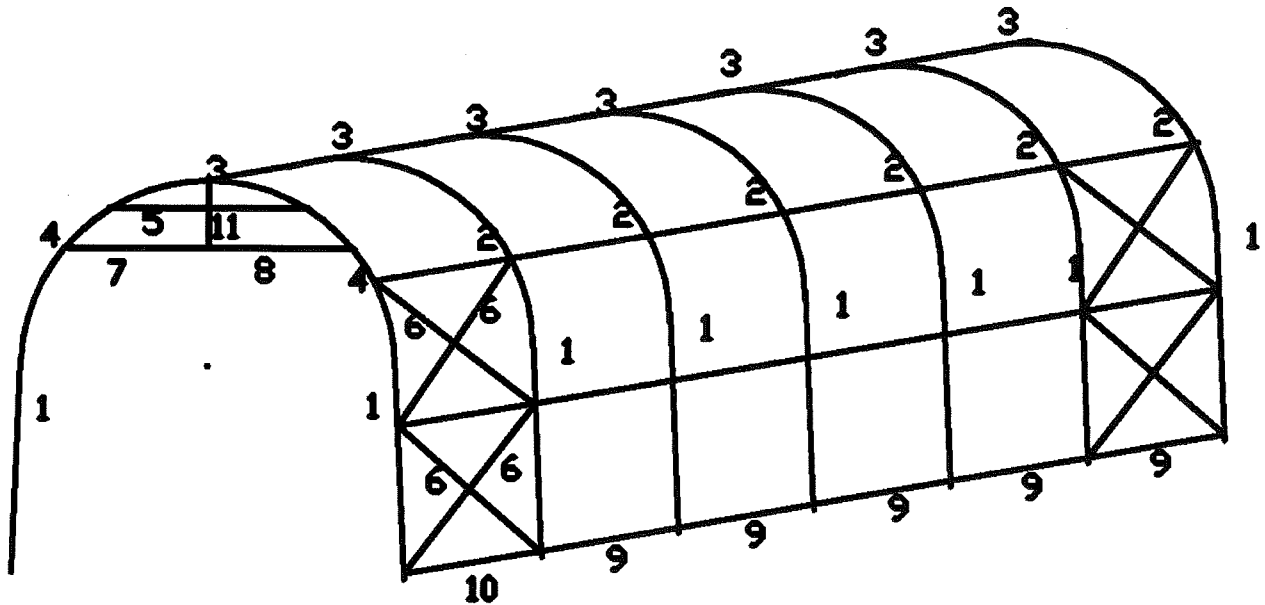





Attention : Glove, Ladder, Glass needed during assemble


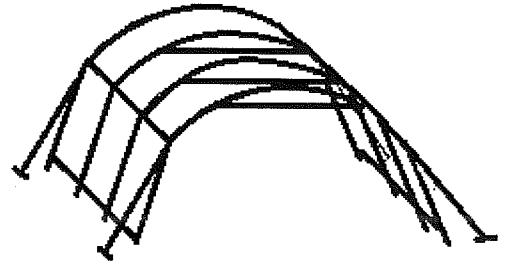










DEAR CUSTOMER

*Assembly with more than four persons suggested.
Please use gloves when assembling the metal frame portion of this unit.*
The metal components of this product have been treated with a rust preventive coating that may feel oily to the touch. This coating is not dangerous, but may dirty your hands during assembly. We recommend that you wipe metal parts clean with a mixture of warm water and dish detergent prior to assembly. Should your hands become dirty, simply wash with soap and water.



PARTS LIST


1.	Leg		14
2.	Corner Arch		12
3.	Center Arch		7
4.	End Corner arch		2
5.	Top cross bar male		7
6.	Diagonal		16

7.	Door rail bar male		1
8.	Door rail bar female		1
9.	Connection pipe		35
10.	Start room connection pipe		7
11.	Door rail reinforce bar		1
12.	Peg(10x305mm)		8
13.	Spiral peg		4
14.	Floor Bracket		4
15.	Bungee Ball		66
16.	Screw		10
17.	S HOOK		16
18.	ROPES		2
19.	Roof		1
20.	End wall		2

ASSEMBLY INSTRUCTIONS

1. Assembly of middle arches


- Take one arch (3); assemble with one main corner arch (2) on the left side.
- Take the other corner arch (2) on the right side.
- Take one completed arch; put screw 1.75" through holes on the right side and attach bar (5) over screw and tighten wing nut
- Repeat same procedures on the left side.

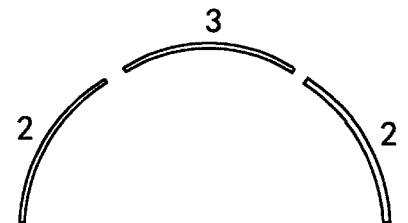


- Repeat step 1 for the remaining middle arches.

3. Assembly of Door end arches (Wing nuts are always on inside of the shelter)

- Take one arch (3); assemble with one end corner arch (4) on the left side.
- Take one completed arch, put 1 3/4" screws through holes on the right side and attach bar (5) over screw and tighten wing nut.
- Slide the rail hooks over bars (7) then put other side (8) attach one end to arch (4) with 1 3/4" screws and wing nuts, take door rail reinforce bar 11 connect with bar (7) and (8) in the middle.**

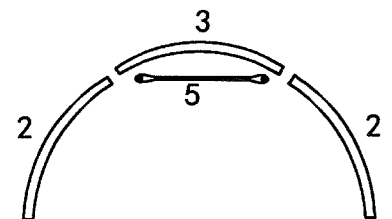

- Take the other end corner arch (4) on the right side.
- Place the last arches assembled at the front of the shelter, this side would be the open door position

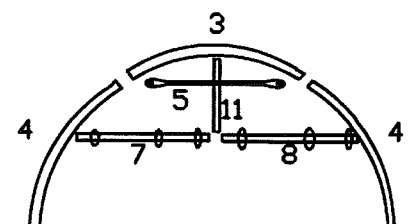

4. Assembly of legs

- Insert leg tube (1) into an arch one side at a time, please pay attention to use screw to tight tube to the arch.
- Add second arch to assembly connecting pipe (9) into (10) with screws 3" and diagonal bar (6) with screw 3" and with wing nuts.

See sketch at front page. Note tube(10) should be placed at the last section or the first section.

c) Repeat step a) and b) until all leg tubes are be installed.

f) Make sure the bottom of the tent standing on the ground with a square shape, this is very improtant.

5. Cover installation (Ties are always on the inside)




a) Place the roof in front of the shelter as illustrated.

b) Unfold as illustrated then lift onto shelter as is.

c) Place cover over the completed structure making sure that the roof is even on the two end side of the frame

d) Use rope to go around the bottom grommet and bottom bar 9 and 10, in this way, roof is tight to the frame. Make left and right even.


e) In the ends of the shelter, there is two ropes inside, tighten the rope so the roof end will come down and close the frame, pls use strength and make it even, then tie the rope to the spiral peg. Like the picture shows.

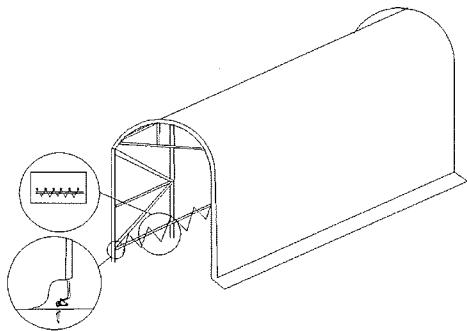

6. Door Assembly

a) There are two different doors on this shelter, one is complete with no door, the other one colse in the middle.

b) First attached the door close in the middle, attached the door hat to the frame with bungee ball, also stick the velcro to the pipe. Then attached the left and right part of the door to the frame pipe with bungee balls. Top attached the rial hook on pipe 7 and 8, then use bungee cord and S hook to close the door both inside and outside, like the picture shows, this picture show you the inside view, from outside the same bungee and S hook.

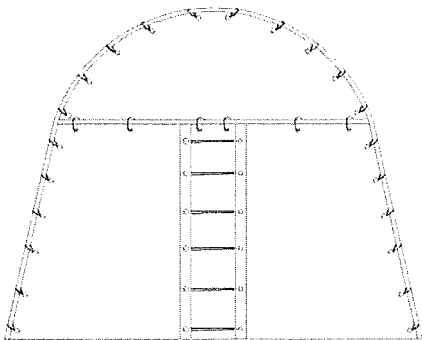

c) The other door would be simple, use the bungee cord to attach the door to the frame, each grommet with one bungee.

7. Anchoring garage.

a) Place your garage in the final position you want then close the doors, front

and back if supplied before anchoring, anchor with brackets and peg as per diagram on the first page.

b) Fix flap to your house (if applicable).

