



CUSTOMER	NEDIS
PRODUCT NO.	UTP-0008-0.5RE Series


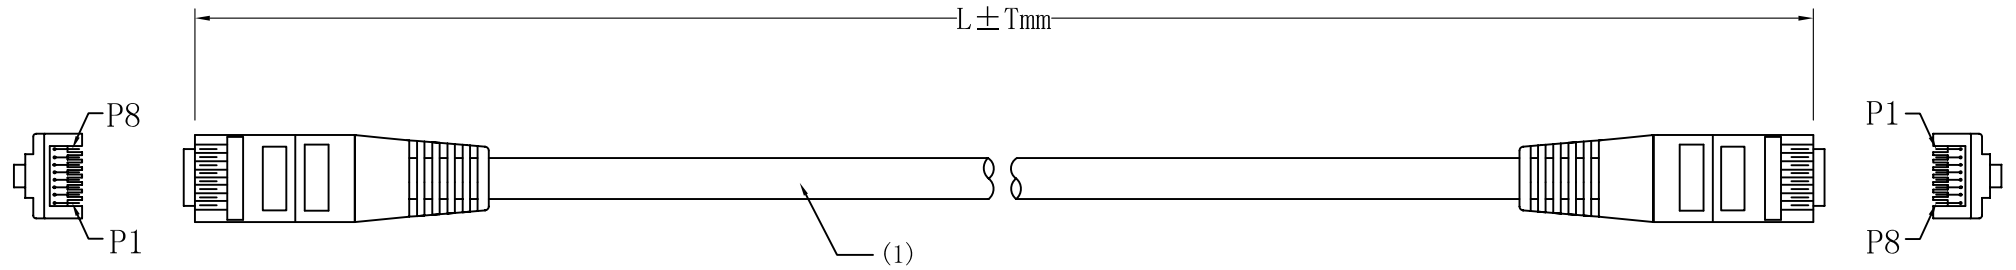


CUSTOMER P/N:	UTP-0008-0.5RE	UTP-0008-1RE	UTP-0008-2RE	UTP-0008-3RE
L ± T (mm)	500 ± 5	1000 ± 10	2000 ± 20	3000 ± 30
UTP-0008-5RE	UTP-0008-10RE	UTP-0008-15RE	UTP-0008-20RE	UTP-0008-30RE
5000 ± 40	10000 ± 70	15000 ± 100	20000 ± 150	30000 ± 200


SIDE:A

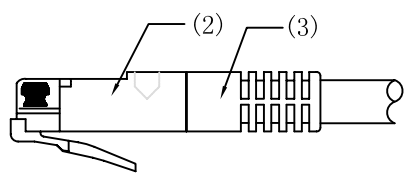

SIDE:B

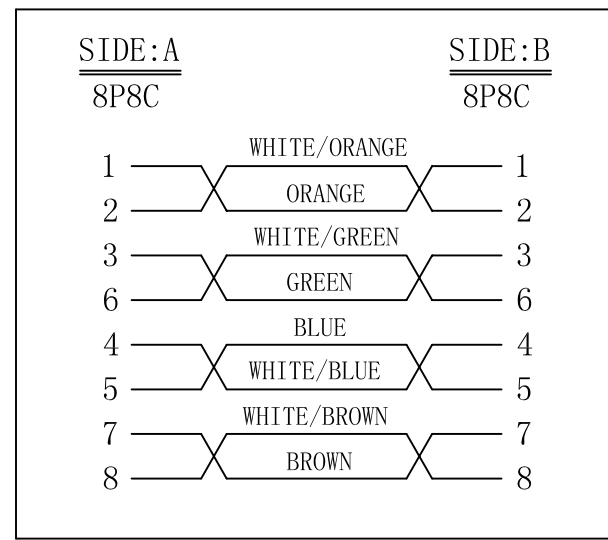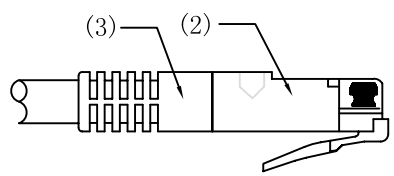

PIN OUT: (4)

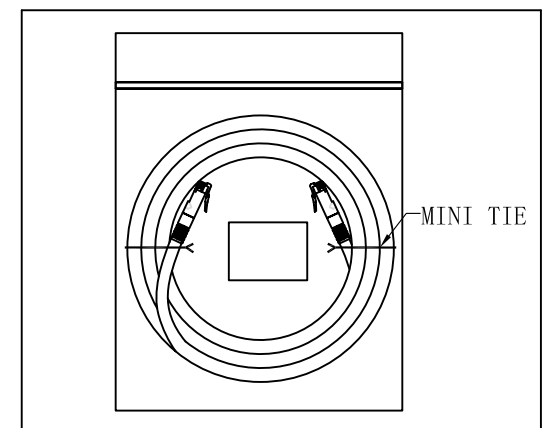

PACKING: (5)

NOTE:

- (1).Cable Wiring: CAT.5E UTP Stranded 26WG(7/0.16 ± 0.01mmCCA) *4P
 Jacket Material:PVC OD:5.0 ± 0.15mm
 Cable Colour: RED
 Cable Printing: System Cable UTP CAT 5E 4 Pairs
 26AWG Stranded ISO 11801 100MHz (AERIAL 12)
- (2).Connector A&B: RJ45(8P8C) Male Type
 INSULATION:Clear Polyester
 CONTACTS:Brass, Gold Plated
- (3).Over Mold: PVC, RED
- (4).Parameter Settings: UT8080M
 1. Conductive Resistance:1kΩ
 2. Insulative Resistance:5MΩ (Min.)
- (5).Packing: POLYBAG Packing+LABEL

GENERAL TOLERANCES (UNLESS SPECIFIED)		UNIT:mm		REV:0/A		NAME	CAT. 5E UTP CABLE(26AWG CCA)
		DRAWING	OYF	2010/10/25		S. P. NO.	HT-1384
0						DWG. NO.	
REV	DESCRIPTION	DATE			SIZE	PAGE	1/1

0		2010/10/25
REV	DESCRIPTION	DATE