



CUSTOMER	NEDIS
PRODUCT NO.	UTP-0008-0.5BU series

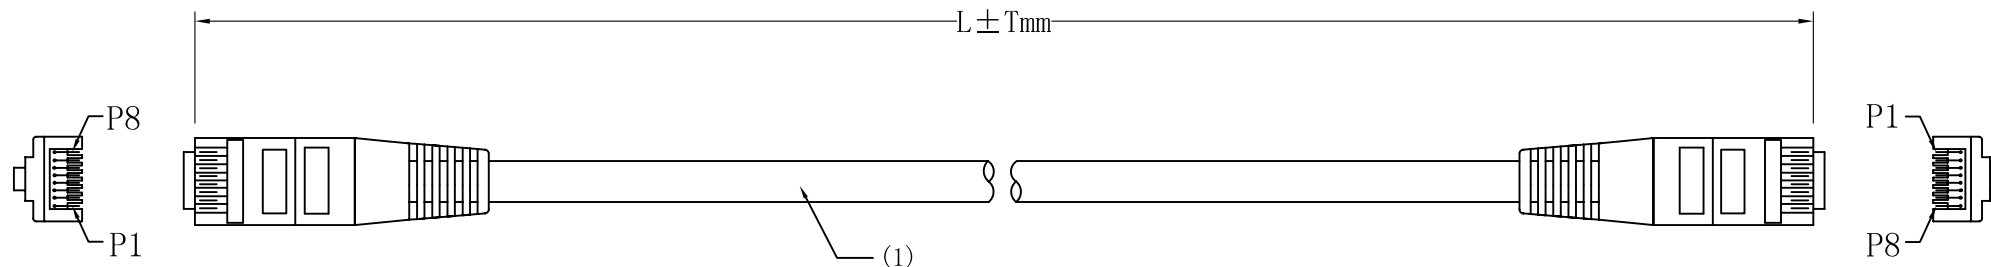


CUSTOMER P/N:	UTP-0008-0.5BU	UTP-0008-1BU	UTP-0008-2BU	UTP-0008-3BU
L ± T (mm)	500 ± 5	1000 ± 10	2000 ± 20	3000 ± 30
UTP-0008-5BU	UTP-0008-10BU	UTP-0008-15BU	UTP-0008-20BU	UTP-0008-30BU
5000 ± 40	10000 ± 70	15000 ± 100	20000 ± 150	30000 ± 200

SIDE:A

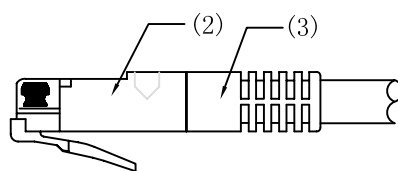

SIDE:B

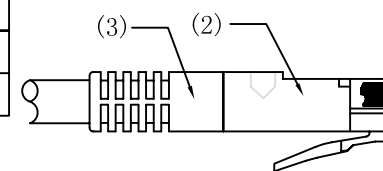


SIDE:A
8P8C


SIDE:B
8P8C

NOTE:

- (1).Cable Wiring: CAT.5E UTP Stranded 26WG(7/0.16±0.01mmCCA)*4P
Jacket Material:PVC OD:5.0±0.15mm
Cable Colour: Blue
Cable Printing: System Cable UTP CAT 5E 4 Pairs
26AWG Stranded ISO 11801 100MHz (AERIAL 12)
- (2).Connector A&B: RJ45(8P8C) Male Type
INSULATION:Clear Polyester
CONTACTS:Brass, Gold Plated
- (3).Over Mold: PVC, Blue
- (4).Parameter Settings: UT8080M
1. Conductive Resistance:1kΩ
2. Insulative Resistance:5MΩ (Min.)
- (5).Packing: POLYBAG Packing+LABEL

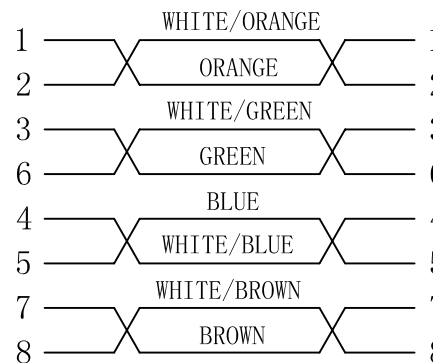

PIN OUT: (4)

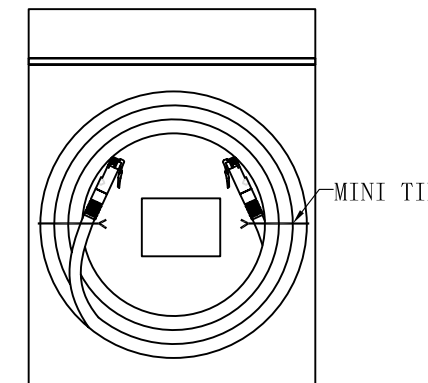

PACKING: (5)

0	REV	DESCRIPTION	DATE	2010/10/25	GENERAL TOLERANCES (UNLESS SPECIFIED)		UNIT:mm		REV:0/A		NAME	CAT. 5E UTP CABLE(26AWG CCA)
					LENGTH: X. ±1	DRAWING	OYF	2010/10/25	S. P. NO.		HT-1382	
					.X±0.2	CHECK			P. O. NO.		PAGE	
					.XX±0.10	APPROVE			SIZE		1/1	
					ANGLE: X° . ±1°							
					.X° ±0° 30'							